



HC 40

Maximum Speed, Minimal Downtime



Production speed
50 bundles/min

The MultiFlow **HC40** is PCMC’s highest productivity bundler. Utilizing continuous flow technology, the HC40 produces bundles with unparalleled quality at the highest speeds in the industry with low maintenance and downtime.

Characteristics

Infeed.....	4 lanes
Mechanical speed.....	50 cycles/min
Production speed.....	50 bundles/min
Layers.....	Opt. Stacker Module
Format changeover time.....	30-40 min
Bundle width.....	203 mm – 520 mm (8" - 20.5")
Bundle length.....	229 mm – 673 mm (9" - 26.5")
Bundle height.....	200 mm - 406 mm (7.87" - 16")
Wrapping material.....	PE, LDPE
PE thickness, LDPE.....	38-76 microns
Reel diameter.....	Up to 762 mm (30")
Real power consumption.....	16 kW
Air consumption.....	<425 l/min
Machine weight.....	18000kg


Key advantages

- Continuous motion design
- Superior bundle quality – tightness, graphics registration, and seal strength
- Side mounted lap seal with upper and lower pull belts to control product to create the tightest bundles
- Six die system for unmatched speeds and seal quality


Major options

- Fast response lap seal heater
- Stacker module for cores down packages
- On Edge infeed for better graphics presentation
- Motorized adjustments with digital feedback

Dimensions

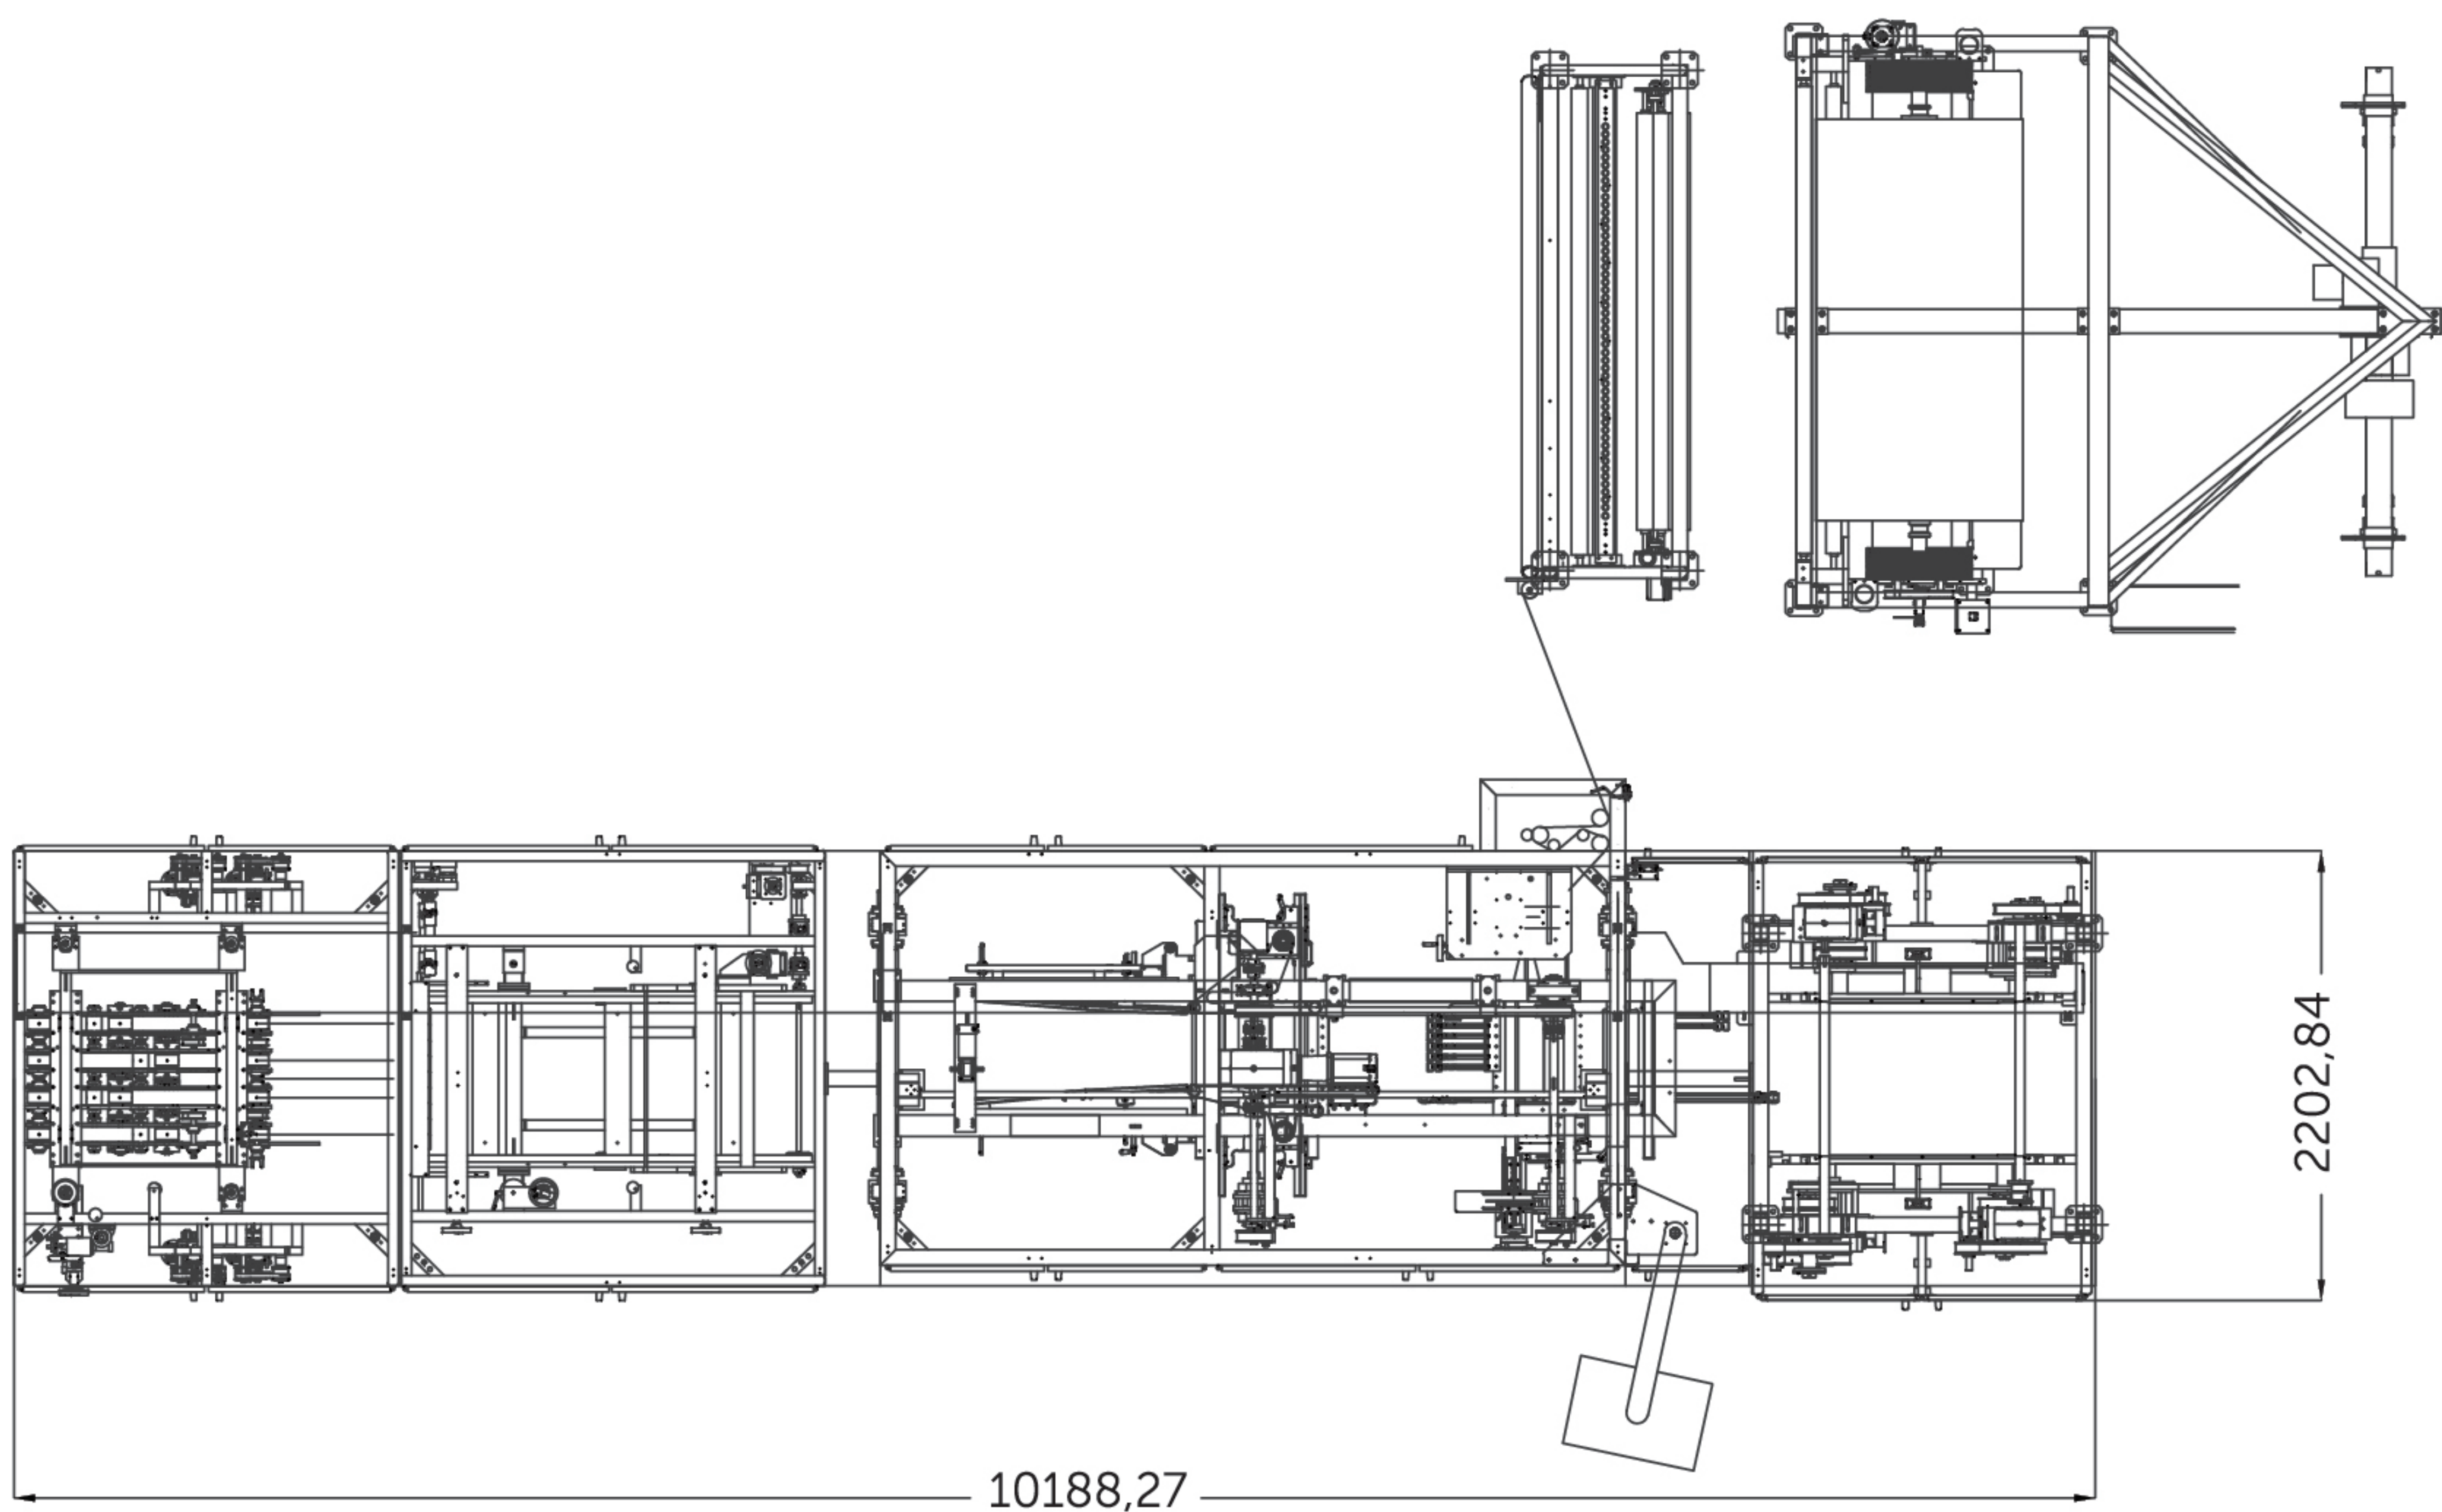

Packaging variations

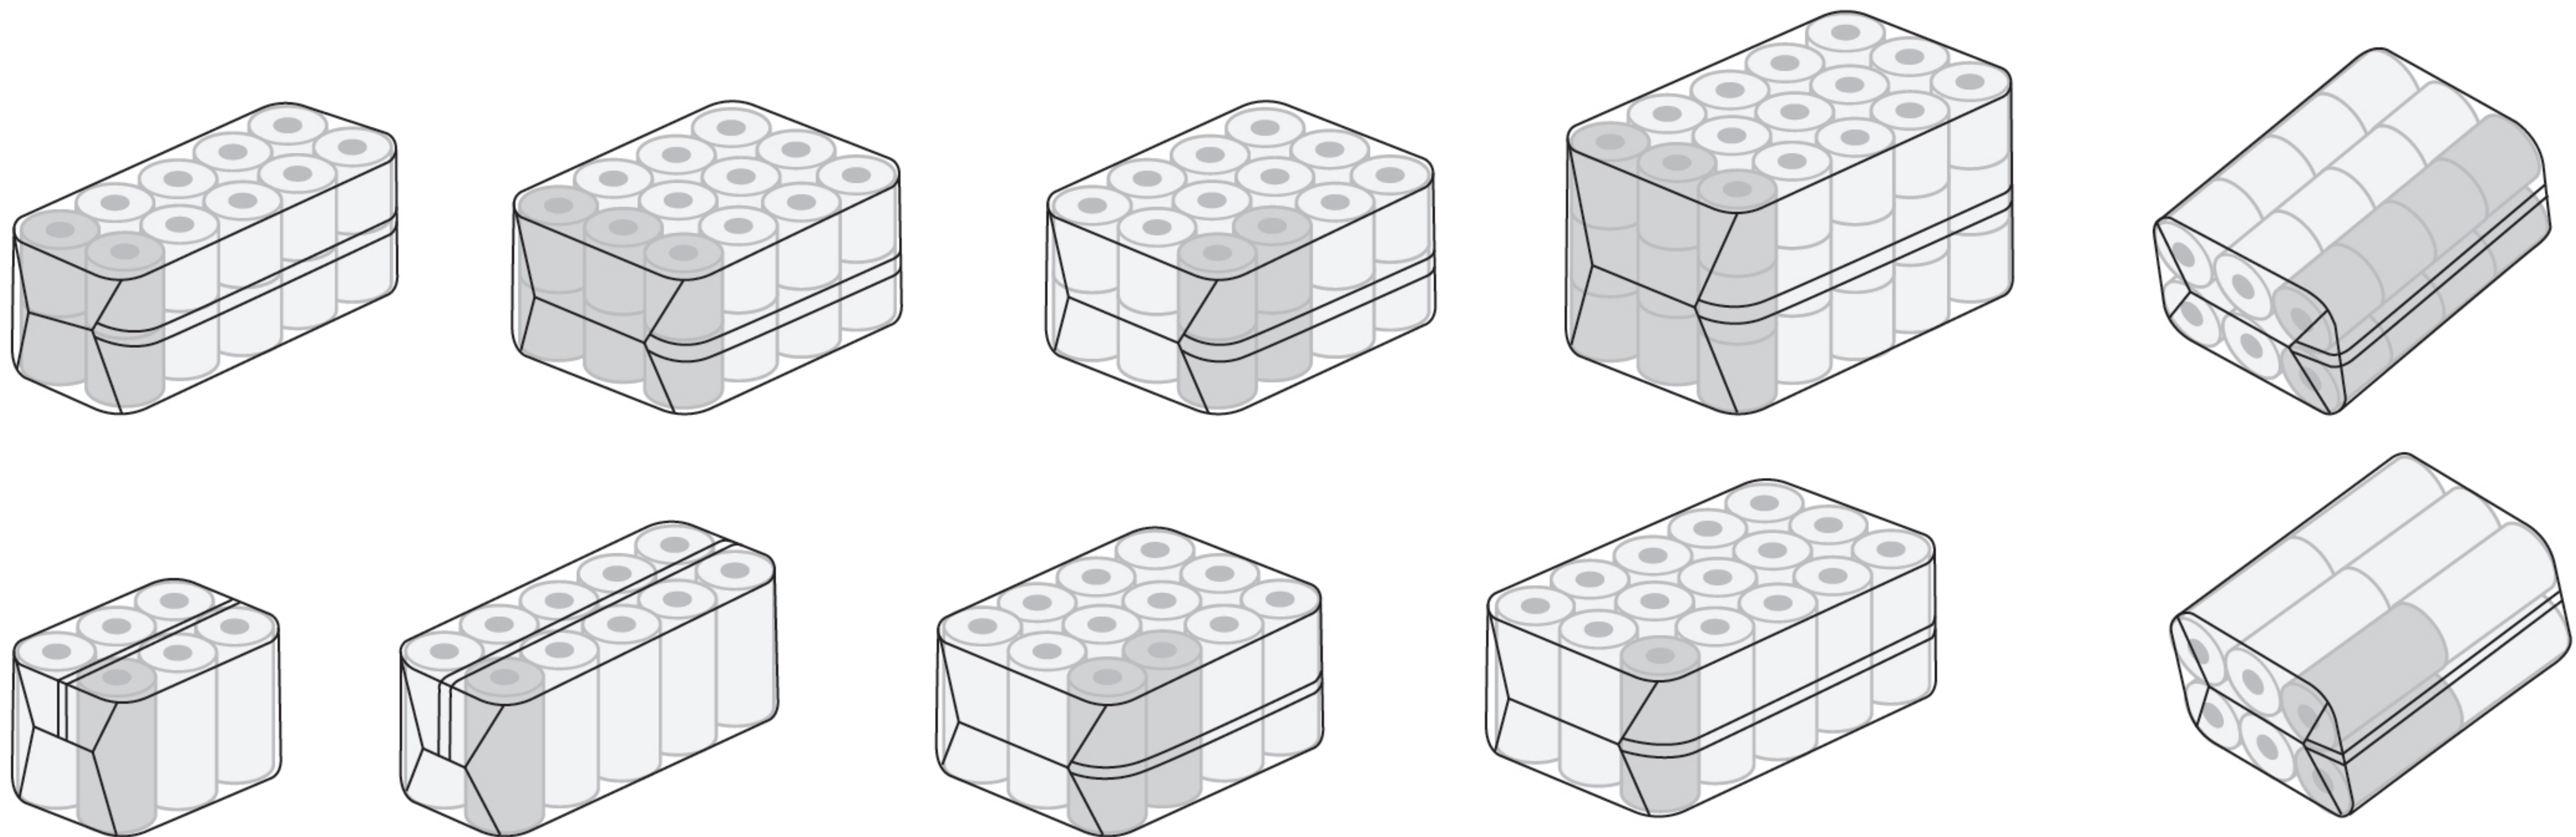

Pictures shown are not representative of every pack/bundle combination. More information can be provided upon request.



Learn more