

XF800

Fast, Flexible, and Future-Ready Wrapping



200 packs/min

The **UltraFlow XF800** is PCMC's latest in flexible bathroom tissue and kitchen towel wrappers. The XF technology is a continuous flow design, producing high quality packages at sustainable high speeds while also having a large format range. New changeover features and compliant materials allow for fast, repeatable changeovers with new on-screen step-bystep instructions.

Characteristics

Infeed	Up to 4 lanes (opt. 5 lanes)
Mechanical speed	200 cycles/min
Production speed	200 packs/mir
Layers	2 (opt. 3 layers)
Format changeover time	25-35 min
Roll diameter	89mm - 203 mm (3.5" - 8")
Roll length	89mm - 343 mm (3.5" - 13.5")
Pack width	89 mm – 635 mm (3.5" - 25")
Pack length	178 mm – 610 mm (7" - 24")
Pack height	89 mm - 381 mm (3.5" - 15")
Wrapping material	PE, LDPE
PE thickness, LDPE	18-38 microns
Reel diameter	1016 mm
Real power consumption.	25kW
Air consumption	< 425 l/min
Machine weight	15500kg


Key advantages

- Continuous motion design
- Motorized adjustments with absolute feedback and calculated positions for fast initial pack setup
- Changeover wizard provides onscreen instructions during changeover
- Compliant materials for wide operating window and variations to incoming product
- Large format range, small format rates
- Limited change parts
- Closed loop film tension control
- Potential film savings with small panels and thinner films
- Left and right film panels or any machine layout
- Fast response lap seal heater: Benefits include better pack quality, energy and film savings, and lower backlog requirements
- LED indicators for timed air


Major options

- 5th infeed lane and 3rd level
- Tipped / Turned roll detect system for infeed conveyor
- 2nd perforator

Dimensions

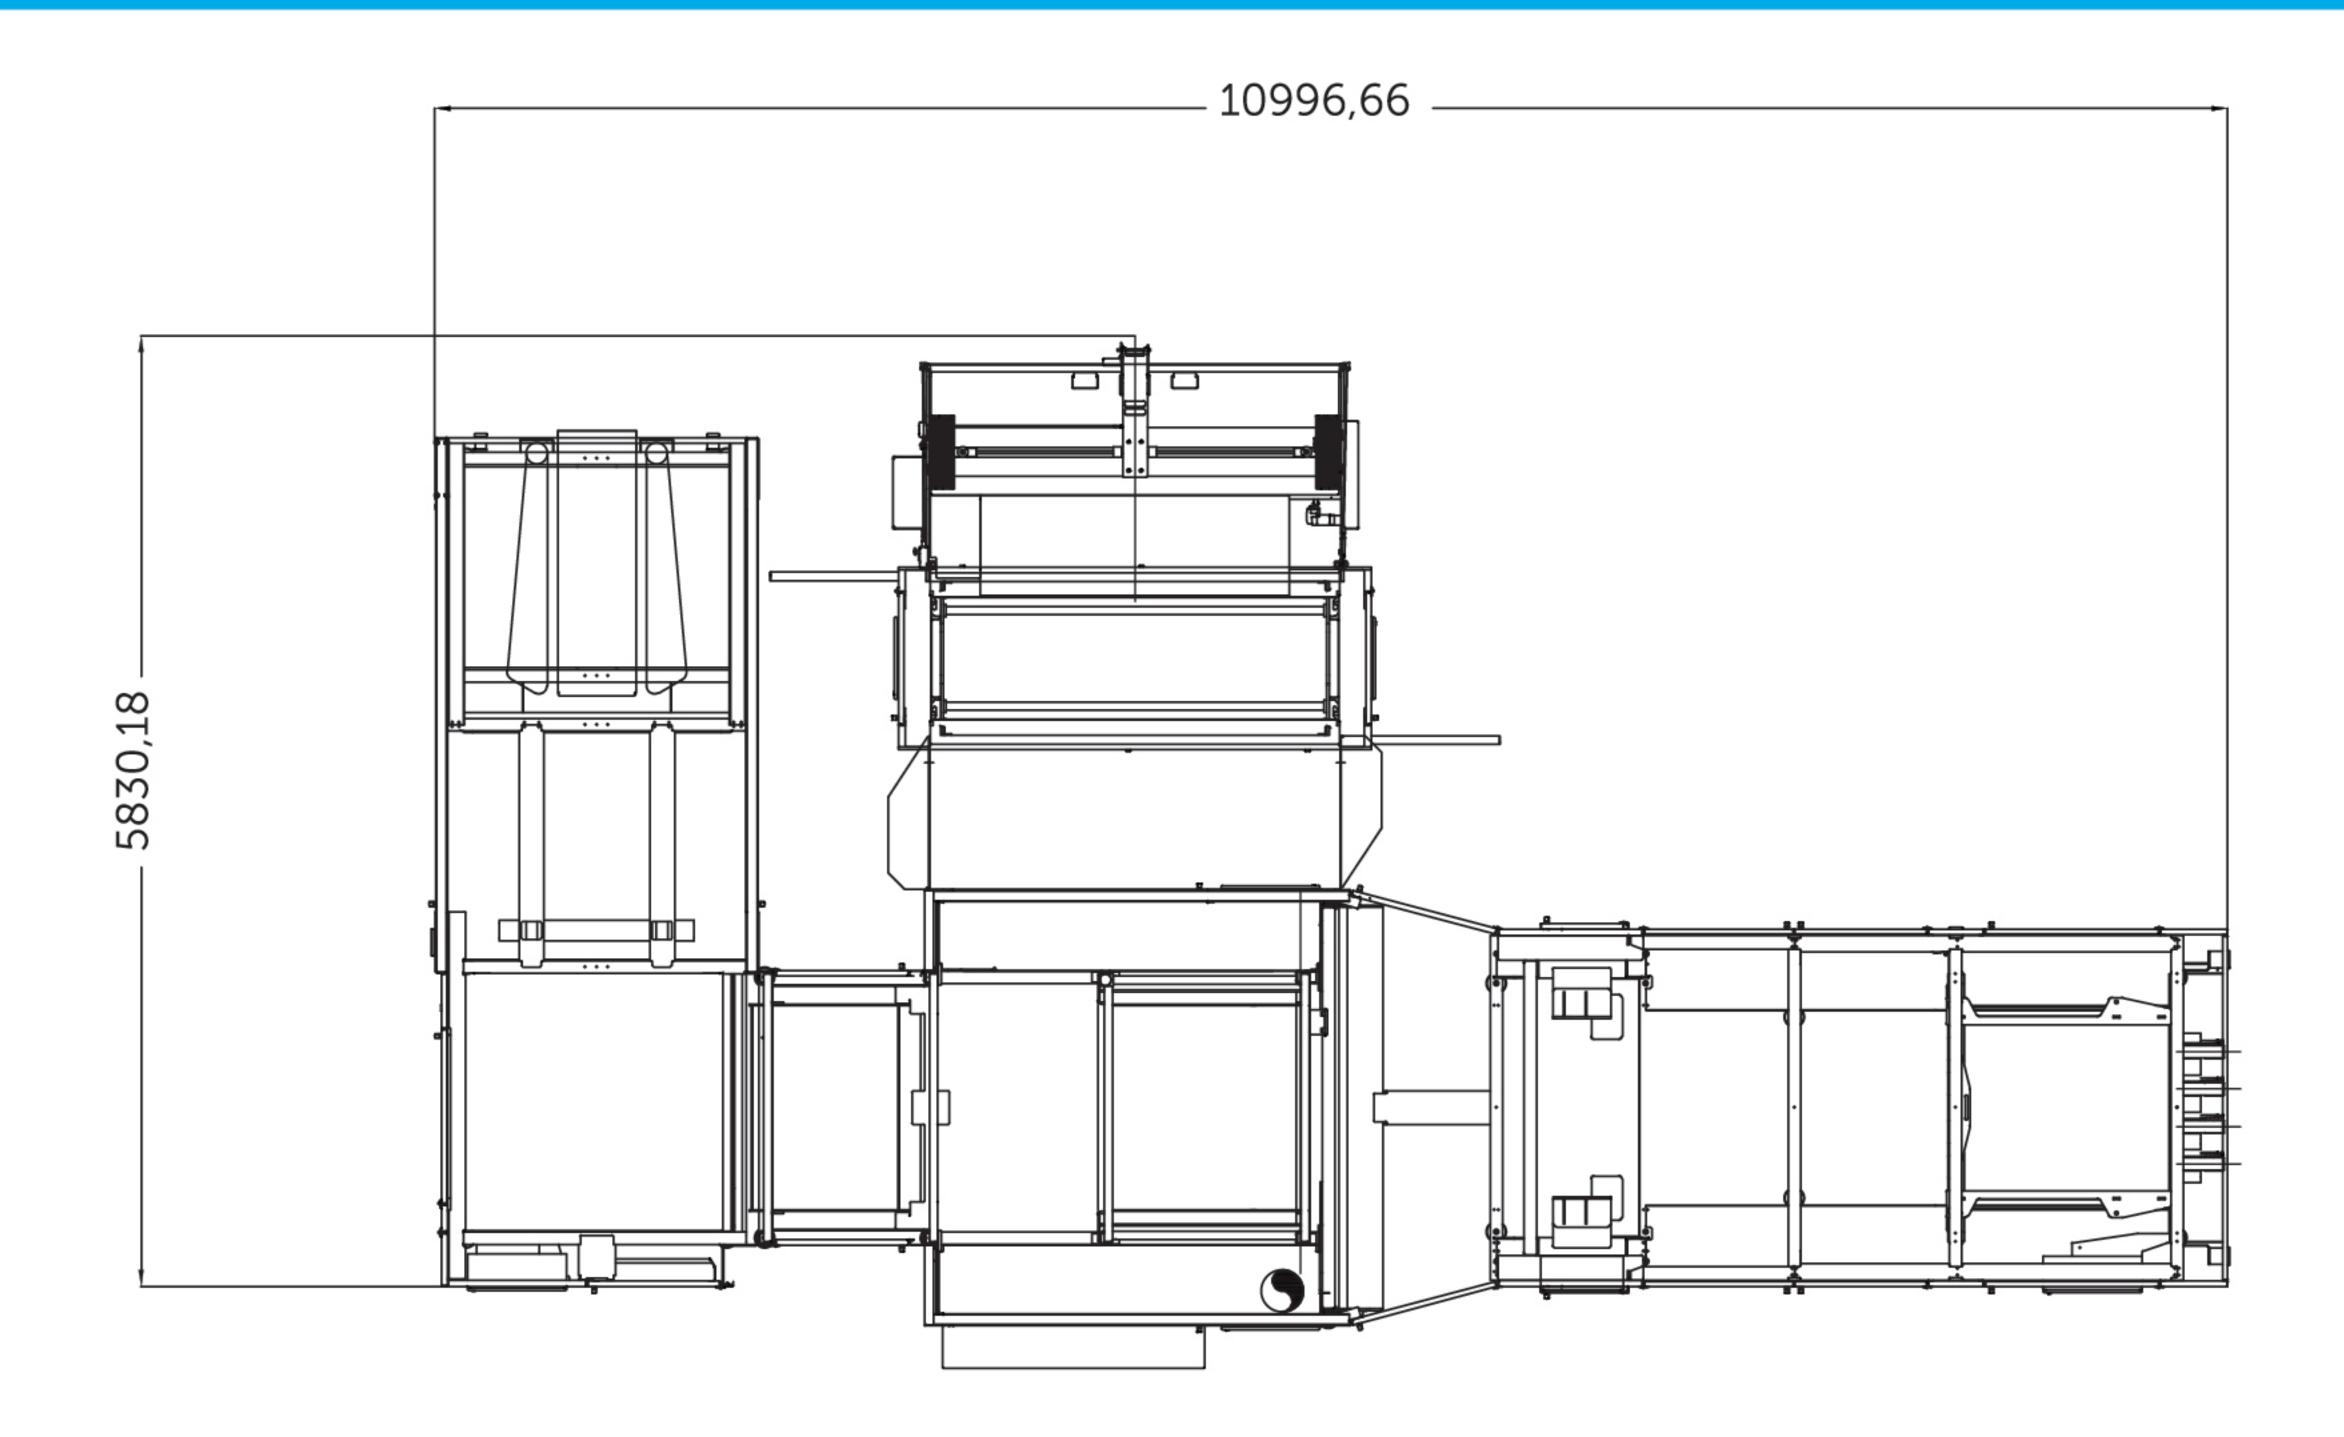

Packaging variations

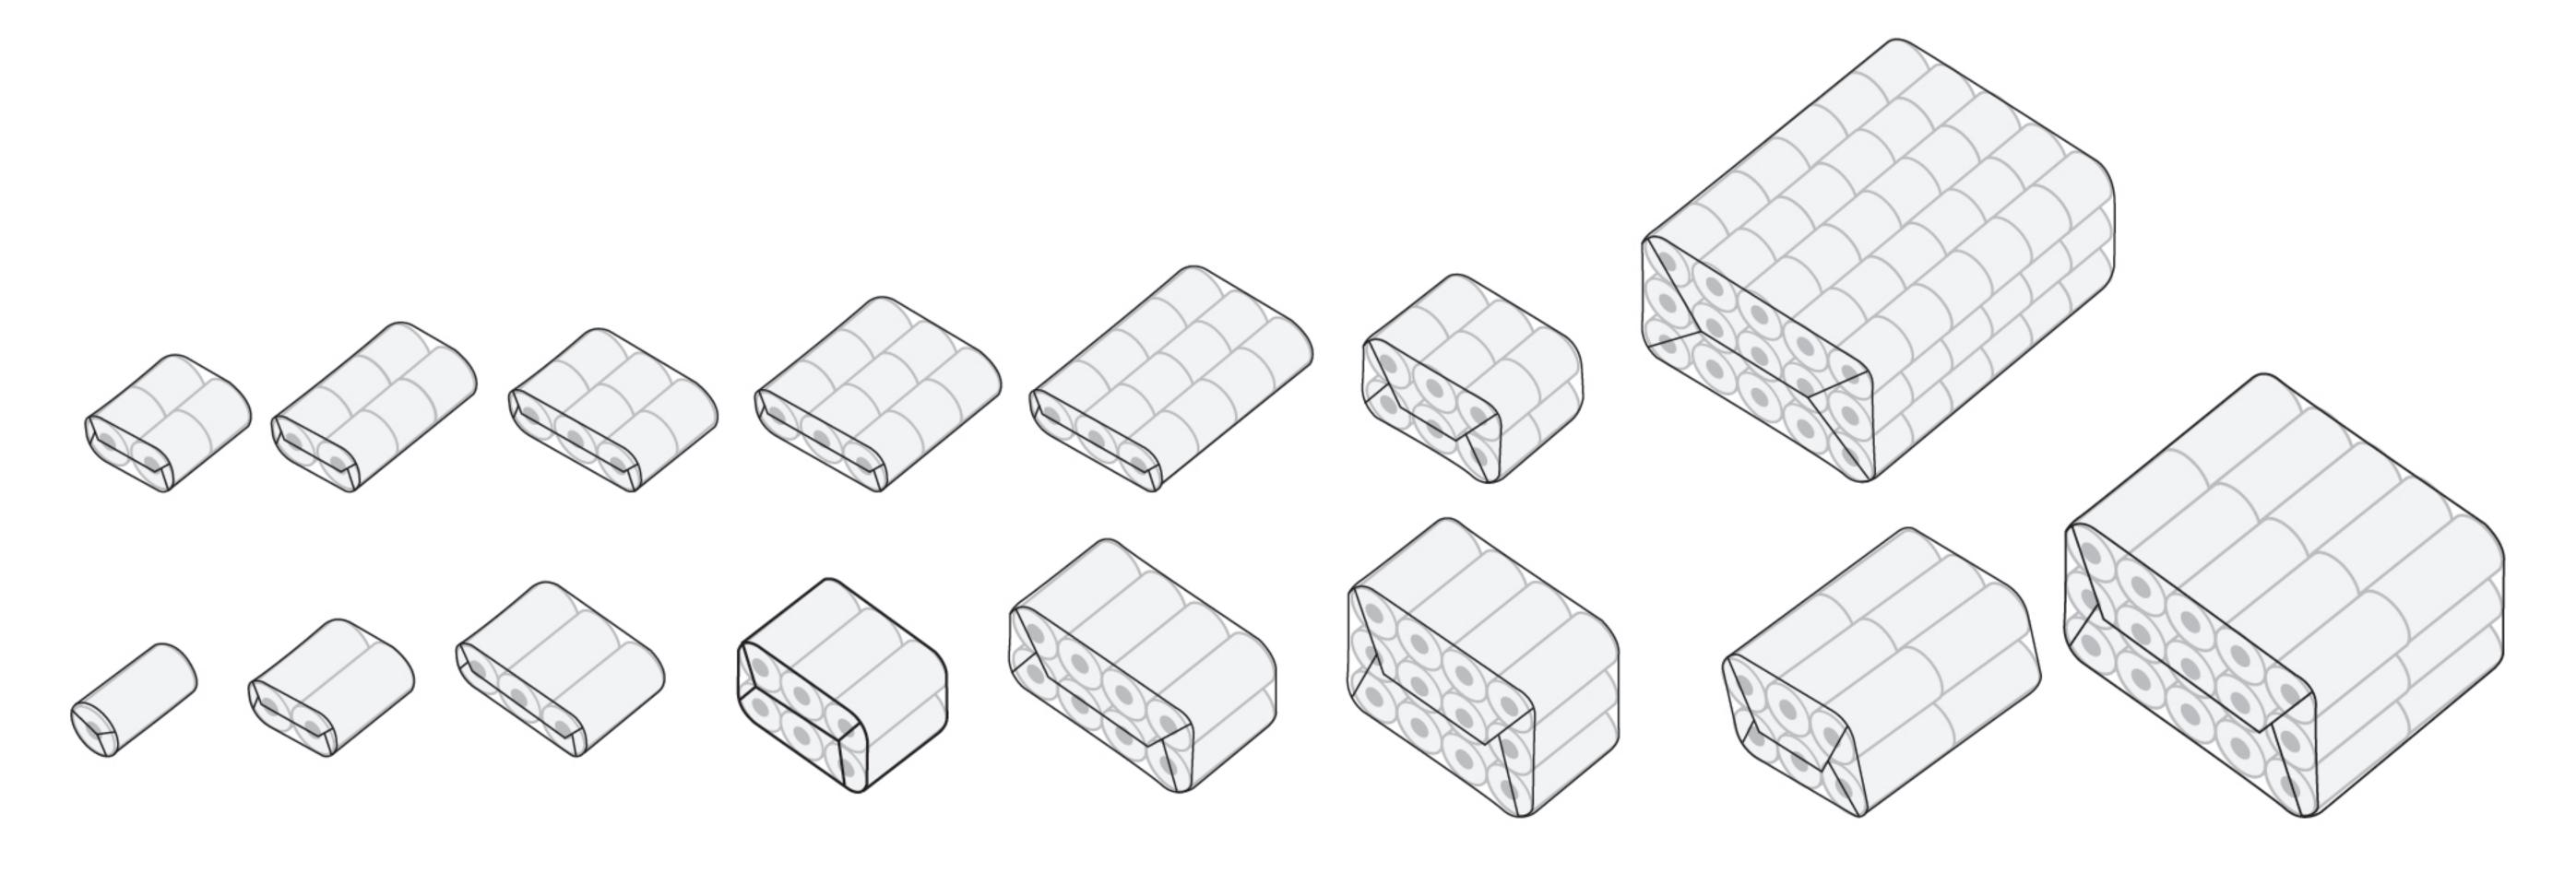

Pictures shown are not representative of every pack/bundle combination. More information can be provided upon request.



Learn more